

C-Txxx

Super Door Access Control and Time Attendance

Model of Function description:

C-T1000



C-T1000 control 1 door / 2 readers/1 doors button (1 In and 1 Out)
C-T2000 control 2 doors / 4 readers/2 doors button (2 In and 2 Out)
C-T4000 control 4 doors / 4 readers/ 4 doors button (4 In or 4 Out)

Feature:


- 1: Stand-alone (with 128k Memory) or online with PC (TCP/IP)
- 2: Support (1/2/4) relays output for controlling switch signal
- 3: With Uninterruptible Power Supply interface

C-T2000



- 4: Support opening door button
- 5: **Anti-pass back** Function
- 6: **Wiegand 26** interface for Identify mode of Card reader, Password, fingerprint reader, bar-code reader (Or any combination)
- 7: With Door broken detective function, micro switch designed to protect reader case damage

C-T4000

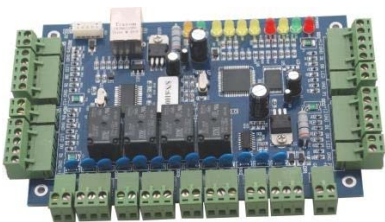

- 8: Enforcing access code function is for emergencies, auto dial the managing center in real-time when the door is opened by force
- 9: Storage capacity: 20,000 cards and 100,000 records
Or 60,000 cards and 60,000records
10. Support SDK

Application:

- School
- Bank
- Government
- Large-scale public